



Anchor for medium-heavy loads in hollow and solid elements

INDEX

ZA-AR

Eye bolt



Assessments:


PATENTADO
PATENT / BREVETÉ

Material for use:

SOLID



Concrete



Reinforced
concrete



Hollow
concrete



Stone



Solid brick



Hollow brick


Product Material / Covering:

Zinc-plated

PROFESSIONAL BOX

CODE	DIMENSIONS			EAN	PRICE
AZAMA06	M6 x 45 Ø12	50 pcs.	600 pcs.	8423533026101	145,013
AZAMA08	M8 x 50 Ø14	50 pcs.	300 pcs.	8423533026200	215,887
AZAMA10	M10 x 56 Ø16	25 pcs.	150 pcs.	8423533026309	278,497
AZAMA12	M12 x 70 Ø20	25 pcs.	100 pcs.	8423533026408	454,427

TECHNICAL INFORMATION

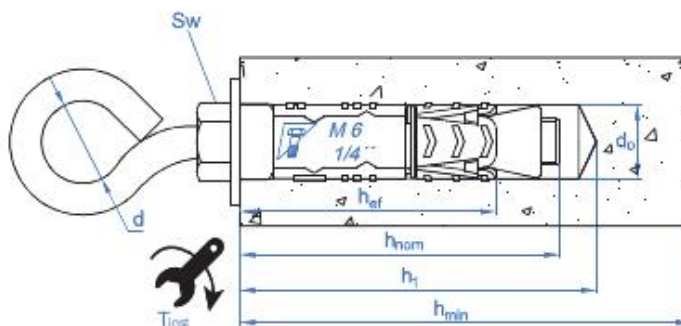

CODE	DIMENSIONS	Drill	Ø element to fix	Hole depth min.	Min. substrate thickness	Min. anchor depth	Effective depth	Torque	Min. distance to edge	Min. distance from axis	Installation key	Eye bolt Ø	Tension load non-cracked concrete
AZAMA06	M6 x 45 Ø12	12	7	60	100	48	41	7	62	125	10	10	73
AZAMA08	M8 x 50 Ø14	14	9	65	100	50	43	15	65	130	13	13	146
AZAMA10	M10 x 56 Ø16	16	12	75	102	58	51	30	80	155	17	14	243
AZAMA12	M12 x 70 Ø20	20	14	90	122	72	61	50	95	185	19	22	316

CHARACTERISTICS



Zinc-plated



Zamak



Medium loads

RECOMMENDED FOR



Tent/Marquee



Shopping mall sign



Sign/Placard

TECHNICAL DOCUMENTATION



DATA SHEET

<https://www.indexfix.com/docs/ft-azam-en.pdf>

*The data shown in this table are merely informative and do not constitute, in any case, contractual conditions of supply. The references contained in our catalog will be available until end of stock. Our prices do not included value added tax. This will be taxed according to current legislation for local and international transactions.