




Anti-spin sleeve anchor, for heavy-duty loads

INDEX

HI-GA Hook bolt

Material for use:

SOLID

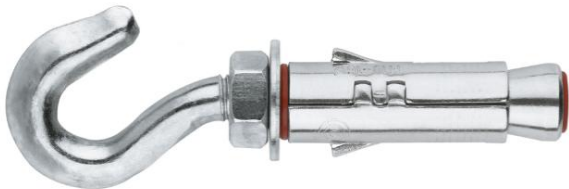

Reinforced concrete



Concrete



Stone





Solid brick


Product Material / Covering:

Zinc-plated

PROFESSIONAL BOX

CODE	DIMENSIONS			EAN	PRICE
AHIGA0645	M6 x 45 Ø12	100 pcs.	400 pcs.	8423533604217	108,225
AHIGA0855	M8 x 55 Ø14	50 pcs.	300 pcs.	8423533604767	169,786
AHIGA1065	M10 x 65 Ø16	50 pcs.	100 pcs.	8423533604774	250,515
AHIGA1275	M12 x 75 Ø20	25 pcs.	75 pcs.	8423533604781	400,704
AHIGA1690	M16 x 90 Ø24	10 pcs.	30 pcs.	8423533604798	780,419

TECHNICAL INFORMATION

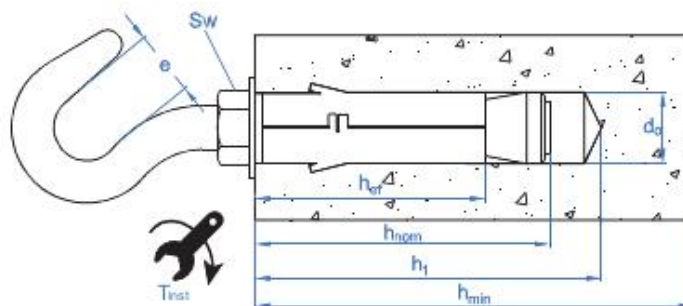

CODE	DIMENSIONS	Drill	Hole depth min.	Min. substrate thickness	Min. anchor depth	Effective depth	Torque	Min. distance to edge	Min. distance from axis	Installation key	Aperture hook	Tension load non-cracked concrete
AHIGA0645	M6 x 45 Ø12	12	60	100	45	30	10	45	90	10	10	84
AHIGA0855	M8 x 55 Ø14	14	65	100	50	35	20	55	105	13	11	155
AHIGA1065	M10 x 65 Ø16	16	75	100	60	45	40	70	135	17	14	284
AHIGA1275	M12 x 75 Ø20	20	90	110	70	55	65	85	165	19	18	396
AHIGA1690	M16 x 90 Ø24	24	105	140	100	70	150	105	210	24	19	681

CHARACTERISTICS



Zinc-plated



Medium loads

RECOMMENDED FOR



Tent/Marquee



Shopping mall sign



Sign/Placard

TECHNICAL DOCUMENTATION



DATA SHEET

<https://www.indexfix.com/docs/ft-hi-en.pdf>

*The data shown in this table are merely informative and do not constitute, in any case, contractual conditions of supply. The references contained in our catalog will be available until end of stock. Our prices do not include value added tax. This will be taxed according to current legislation for local and international transactions.