



Winged steel anchor for heavy-duty fixings

INDEX


AC-CA Shield

Material for use:

SOLID



Reinforced
concrete



Concrete



Stone



Solid brick


Product Material / Covering:

Zinc-plated

PROFESSIONAL BOX

CODE	DIMENSIONS			EAN	PRICE	
AACCA06	M6 x 40 Ø10	50 pcs.	1200 pcs.	-	8423533594433	22,231
AACCA08	M8 x 50 Ø14	50 pcs.	600 pcs.	100	8423533594457	35,465
AACCA10	M10 x 60 Ø16	50 pcs.	300 pcs.	100	8423533594471	46,309
AACCA12	M12 x 80 Ø20	25 pcs.	300 pcs.	50	8423533594495	83,897
AACCA16	M16 x 100 Ø25	10 pcs.	120 pcs.	20	8423533594518	225,563

TECHNICAL INFORMATION

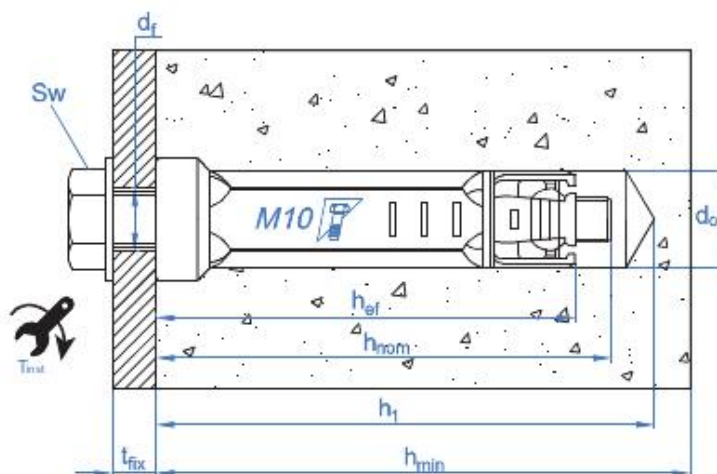

CODE	DIMENSIONS	Drill	Ø element to fix	Hole depth min.	Min. substrate thickness	Min. anchor depth	Effective depth	Torque	Min. distance to edge	Min. distance from axis	Tension load non-cracked concrete	Shear load non-cracked concrete
AACCA06	M6 x 40 Ø10	10	7	55	100	40	40	10	60	120	143	351
AACCA08	M8 x 50 Ø14	14	9	70	100	50	50	25	75	150	163	640
AACCA10	M10 x 60 Ø16	16	12	80	120	60	60	50	90	180	510	1014
AACCA12	M12 x 80 Ø20	20	14	90	160	80	80	85	120	240	602	1473
AACCA16	M16 x 100 Ø25	25	18	115	200	100	100	120	150	300	837	2744

CHARACTERISTICS




Zinc-plated



Heavy loads

RECOMMENDED FOR



Air conditioning



Aerial



Park bench



Handrails



Balcony handrail



Motorway railing



Wooden guardrail



Tent/Marquee

TECHNICAL DOCUMENTATION



DATA SHEET

<https://www.indexfix.com/docs/ft-ac-en.pdf>

*The data shown in this table are merely informative and do not constitute, in any case, contractual conditions of supply. The references contained in our catalog will be available until end of stock. Our prices do not include value added tax. This will be taxed according to current legislation for local and international transactions.