



Concrete screw, hexagonal head, Hi-Lo thread, diamond point

INDEX

HEA Screw



Material for use:

SOLID



Concrete



Aerated
concrete


Product Material / Covering:

Blue organic galvanized

PROFESSIONAL BOX

CODE	DIMENSIONS			EAN	PRICE
HE65032	6,5 x 32 Ø5	1000 pcs.	3000 pcs.	8423533156006	12,187
HE65045	6,5 x 45 Ø5	500 pcs.	2000 pcs.	8423533156105	14,980
HE65057	6,5 x 57 Ø5	500 pcs.	2000 pcs.	8423533156204	19,317
HE65070	6,5 x 70 Ø5	500 pcs.	1500 pcs.	8423533156303	24,680
HE65080	6,5 x 80 Ø5	250 pcs.	1000 pcs.	8423533156402	29,403
HE65100	6,5 x 100 Ø5	250 pcs.	1000 pcs.	8423533156501	35,940
HE65125	6,5 x 125 Ø5	250 pcs.	1000 pcs.	8423533156600	46,667

TECHNICAL INFORMATION

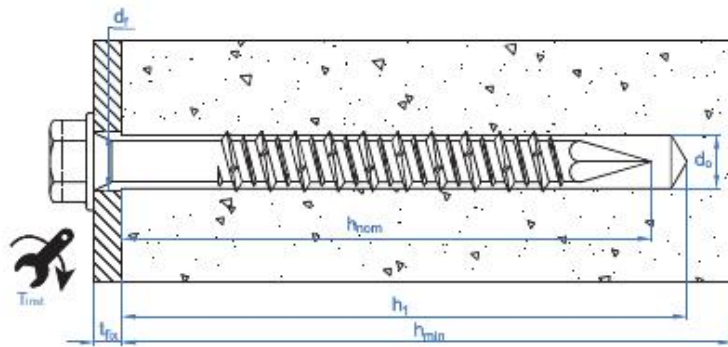

CODE	DIMENSIONS	Drill	Ø element to fix	Hole depth min.	Min. anchor depth	Max. fixture thickness	Installation key	Tension load non-cracked concrete
HE65032	6,5 x 32 Ø5	5	7	35	30	2	8 + ranura	65
HE65045	6,5 x 45 Ø5	5	7	35	30	15	8 + ranura	65
HE65057	6,5 x 57 Ø5	5	7	35	30	27	8 + ranura	65
HE65070	6,5 x 70 Ø5	5	7	35	30	40	8 + ranura	65
HE65080	6,5 x 80 Ø5	5	7	35	30	50	8 + ranura	65
HE65100	6,5 x 100 Ø5	5	7	35	30	70	8 + ranura	65
HE65125	6,5 x 125 Ø5	5	7	35	30	95	8 + ranura	65

CHARACTERISTICS



Blue organic galvanized



Medium loads




Hexagonal with slot



Hexagonal with washer

RECOMMENDED FOR



Air conditioning



Fire extinguisher anchor



Shopping mall sign



Lamps



Sign/Placard



Window guards



Signs



Wooden guardrail

TECHNICAL DOCUMENTATION



DATA SHEET

<https://www.indexfix.com/docs/ft-hor-en.pdf>

*The data shown in this table are merely informative and do not constitute, in any case, contractual conditions of supply. The references contained in our catalog will be available until end of stock. Our prices do not included value added tax. This will be taxed according to current legislation for local and international transactions.