



HC Shield



Assessments:



Material for use:

HOLLOWS

Hollow-core slab


Product Material / Covering:

Zinc-plated

PROFESSIONAL BOX

	CODE	DIMENSIONS			EAN	PRICE
 	HCM06	M6	100 pcs.	600 pcs.	8423533771100	73,733
 	HCM08	M8	50 pcs.	600 pcs.	8423533771117	88,770
 	HCM10	M10	25 pcs.	300 pcs.	8423533771124	125,420

TECHNICAL INFORMATION

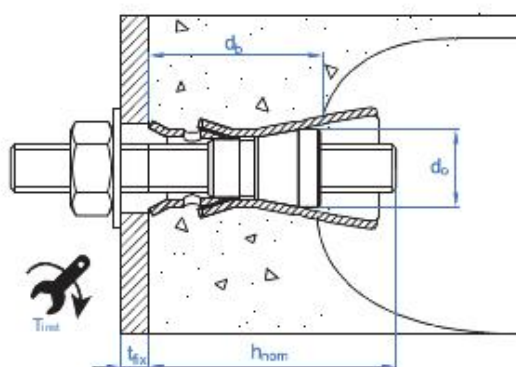

CODE	DIMENSIONS	Drill	Ø element to fix	Hole depth min.	Min. substrate thickness	Min. anchor depth	Effective depth	Torque	Min. distance to edge	Min. distance from axis	Tension load cracked concrete	Shear load cracked concrete
------	------------	-------	------------------	-----------------	--------------------------	-------------------	-----------------	--------	-----------------------	-------------------------	-------------------------------	-----------------------------

HCM06	M6	10	7	45	25	38	25	10	100	60	142	142
HCM08	M8	12	9	50	25	44	25	20	100	70	243	243
HCM10	M10	16	12	60	25	53	25	30	100	80	324	324

CHARACTERISTICS



Zinc-plated



Medium loads

TECHNICAL DOCUMENTATION



APPROVAL SHEET

<https://www.indexfix.com/docs/ce-hc-en.pdf>



CERT_EOTA

<https://www.indexfix.com/docs/eta-hc-en.pdf>



DOP

<https://www.indexfix.com/docs/dop-hc-en.pdf>



DATA SHEET

<https://www.indexfix.com/docs/ft-hc-en.pdf>



DATA SHEET

<https://www.indexfix.com/docs/fta-hc-en.pdf>

*The data shown in this table are merely informative and do not constitute, in any case, contractual conditions of supply. The references contained in our catalog will be available until end of stock. Our prices do not included value added tax. This will be taxed according to current legislation for local and international transactions.