



Concrete screw, hexagonal head, Hi-Lo thread, diamond point

INDEX

HEA + ARVUL

Screw with ARVUL

Material for use:

SOLID



Concrete



Aerated
concrete




Product Material / Covering:

Blue organic galvanized

PROFESSIONAL BOX

CODE	DIMENSIONS			EAN	PRICE
HE1665032	6,5 x 32 P16 Ø5	1000 pcs.	2000 pcs.	8423533156709	19,090
HE1665045	6,5 x 45 P16 Ø5	500 pcs.	1500 pcs.	8423533156808	22,480
HE1665057	6,5 x 57 P16 Ø5	500 pcs.	1500 pcs.	8423533156907	27,420
HE1665070	6,5 x 70 P16 Ø5	500 pcs.	1000 pcs.	8423533157003	31,033
HE1665080	6,5 x 80 P16 Ø5	250 pcs.	750 pcs.	8423533157102	37,343
HE1665100	6,5 x 100 P16 Ø5	250 pcs.	750 pcs.	8423533157201	43,697
HE1665125	6,5 x 125 P16 Ø5	250 pcs.	500 pcs.	8423533157300	55,450

TECHNICAL INFORMATION

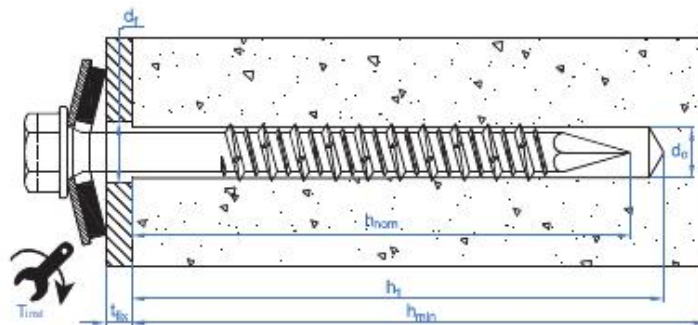

CODE	DIMENSIONS	Drill	Ø element to fix	Hole depth min.	Min. anchor depth	Max. fixture thickness	Installation key	Tension load non-cracked concrete
HE1665032	6,5 x 32 P16 Ø5	5	7	35	30	2	8 + ranura	65
HE1665045	6,5 x 45 P16 Ø5	5	7	35	30	15	8 + ranura	65
HE1665057	6,5 x 57 P16 Ø5	5	7	35	30	27	8 + ranura	65
HE1665070	6,5 x 70 P16 Ø5	5	7	35	30	40	8 + ranura	65
HE1665080	6,5 x 80 P16 Ø5	5	7	35	30	50	8 + ranura	65
HE1665100	6,5 x 100 P16 Ø5	5	7	35	30	70	8 + ranura	65
HE1665125	6,5 x 125 P16 Ø5	5	7	35	30	95	8 + ranura	65

CHARACTERISTICS



Blue organic galvanized



Medium loads




Hexagonal with slot



Hexagonal with washer

RECOMMENDED FOR



Air conditioning



Shopping mall sign



Lamps



Sign/Placard



Window guards



Signs



Motorway railing



Wooden guardrail

TECHNICAL DOCUMENTATION



DATA SHEET

<https://www.indexfix.com/docs/ft-hor-en.pdf>

*The data shown in this table are merely informative and do not constitute, in any case, contractual conditions of supply. The references contained in our catalog will be available until end of stock. Our prices do not included value added tax. This will be taxed according to current legislation for local and international transactions.